

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

GU

Group Art Unit: Not yet assigned

Application No.: Not yet assigned

Examiner: Not yet assigned

Filed: Concurrently herewith

Attorney Dkt. No.: 60091.00272

For: RADIO RESOURCE CONTROL

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

February 26, 2004

Sir:

The benefit of the filing dates of the following prior foreign application(s) filed in the following foreign country(ies) is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:

Finnish Patent Application No. 20031688 filed on November 20, 2003 in Finland

In support of this claim, certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document(s).

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,

A handwritten signature in black ink, appearing to read 'W. F. Nixon', written over a horizontal line.

William F. Nixon

Registration No. 44,262

Customer No. 32294

SQUIRE, SANDERS & DEMPSEY LLP

14TH Floor

8000 Towers Crescent Drive

Tysons Corner, Virginia 22182-2700

Telephone: 703-720-7800

Fax: 703-720-7802

DHG:mm

Enclosure: Priority Document (1)

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 4.12.2003

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Nokia Corporation
Helsinki

Patenttihakemus nro
Patent application no

20031688

Tekemispäivä
Filing date

20.11.2003

Kansainvälinen luokka
International class


H04B

Keksinnön nimitys
Title of invention

"Radio resource control"
(Radiojärjestelmän hallinta)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.


Pirjo Kalla
Tutkimussihteeri

Maksu 50
Fee 50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite:	Arkadiankatu 6 A	Puhelin:	09 6939 500	Telefax:	09 6939 5328
	P.O.Box 1160.	Telephone:	+ 358 9 6939 500	Telefax:	+ 358 9 6939 5328
	FIN-00101 Helsinki, FINLAND				

Radio resource control

Field

The invention relates to a method of controlling radio resources in telecommunications system, an arrangement, and a radio network controller.

5 Background

Controlling the transmit power of radio channels plays a significant role in the performance of interference limited telecommunications systems, such as CDMA (Code Division Multiple Access) systems. As the performance requirements have increased, the power control is required to account for fast
10 temporal changes in the radio channels.

One tool for providing a fast power control is based on closed-loop power control, wherein a receiver receives a dedicated channel and performs a SIR (Signal-to-Interference Ratio) measurement on the dedicated channel. A transmit power control command is generated based on a comparison be-
15 tween a target SIR and the SIR measurement, and the transmit power control command is transmitted to the transmitter in order to adjust the transmit power of the dedicated channel to provide the target SIR. The target SIR is typically generated on the basis of success or failure of decoding a coding block, such as a frame, within limits of required quality, such as that defined by a FER tar-
20 get.

Some telecommunications systems support rate control, which enables changing the data rate in a time scale of the order of the duration of data coding block.

Therefore it is desired to consider power control methods, which ac-
25 count for the rate control.

Brief description of the invention

An object of the invention is to provide an improved radio resource control method and a device implementing the method. According to an aspect of the invention, there is provided a method of controlling radio resources in telecommunications system supporting use of a plurality of data transfer rates in transmission of dedicated channels between a transmitter and a receiver, in
30 which method a target SIR is adjusted to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing a reference SIR value for closed-loop power control, wherein a comparison be-

tween a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter on the basis of the comparison.

According to a second aspect of the invention, there is provided an arrangement for controlling radio resources in telecommunications system supporting use of a plurality of data transfer rates in transmission of a dedicated channel transmitted from a transmitter to a receiver, the arrangement including an adjusting unit connected to the receiver, for adjusting a target SIR to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing a reference SIR value for closed-loop power control, wherein a comparison between a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter on the basis of the comparison.

According to another aspect of the invention, there is provided a radio network controller in telecommunications system supporting use of a plurality of data transfer rates in transmission of a dedicated channel from a transmitter to a receiver, the radio network controller including an adjusting unit connected to the receiver, for adjusting a target SIR to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing a reference SIR value for closed-loop power control, wherein a comparison between a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter on the basis of the comparison.

Preferred embodiments of the invention are described in the dependent claims.

The method and system of the invention provide several advantages. The invention provides data-rate-sensitive power control of a transmitter, thus increasing the accuracy of the power control and improving the performance of the telecommunications system.

List of drawings

In the following, the invention will be described in greater detail with reference to the preferred embodiments and the accompanying drawings, in which

Figure 1 shows an example of telecommunications system;

Figure 2 shows a second example of telecommunications system;

Figure 3 shows time evolution of parameters associated with data transfer, and

5 Figure 4 shows methodology according to embodiments of the invention.

Description of embodiments

Figure 1 shows an example of telecommunications system by means of a simplified block diagram. The structure and functions of the network elements are only described when relevant to the present solution.

The illustrated telecommunications system includes a core network (CN) 100, a radio access network 130 and a mobile station (MS) 170. For simplicity, a radio access network 130 called UTRAN (UMTS (Universal Mobile Telecommunications System) Terrestrial Radio Access Network) is taken as an example. UTRAN belongs to the third generation and is implemented with WCDMA (Wideband Code Division Multiple Access) technology. The solution is not limited to a WCDMA radio interface but applications exist which are implemented with cdma2000, MC-CDMA (Multi-Carrier Code Division Multiple Access) or OFDMA (Orthogonal Frequency Division Multiple Access) technologies without restricting the invention to those technologies.

The telecommunications system may be divided into a mobile station 170 and a network part. The mobile station 170 may also be called user equipment, a terminal, a subscriber terminal and a mobile telephone. The mobile station 170 may also be a radio modem providing an air interface for a portable computer device.

The network part comprises the fixed infrastructure of the radio system, i.e. the core network 100 and the radio access network 130.

The illustrated structure of the core network 100 corresponds to a system, which incorporates both circuit-switched and packet-switched domains. Both domains may share the radio access network 130.

A mobile services switching center (MSC) 102 is the center point of the circuit-switched domain of the core network 100. The mobile services switching center 102 typically serves the connections of the radio access network 130. The tasks of the mobile services switching center 102 include: switching, paging, user equipment location registration, handover manage-

ment, collection of subscriber billing information, encryption parameter management, and echo cancellation.

Large core networks 100 may have a separate gateway mobile services switching center (GMSC) 110, which is typically responsible for circuit-switched connections between the core network 100 and external networks 180, such as a public land mobile network (PLMN) and a public switched telephone network (PSTN).

A serving GPRS support node (SGSN) 118 is the center point of the packet-switched domain of the core network 100. The main task of the serving GPRS support node 118 is to transmit and receive packets together with the mobile station 170 supporting packet-switched transmission by using the radio access network 130 or the base station system. The serving GPRS support node 118 contains subscriber and location information related to the mobile station 170.

A gateway GPRS support node (GGSN) 120 is the packet-switched side counterpart of the gateway mobile services switching center 110 of the circuit-switched side with the exception, however, that the gateway GPRS support node 120 must also be capable of routing traffic from the core network 100 to external networks 182, whereas the gateway mobile services switching center 110 only routes incoming traffic. In our example, external networks 182 are represented by the Internet.

The radio access network 130 comprises radio network subsystems 140, 150. Each radio network subsystem 140, 150 comprises radio network controllers (RNC) 146, 156 and base transceiver stations (BTS) 142, 144, 152, 154. Terms such as 'base station' and 'node B' instead of 'base transceiver station' may also be used. The base station 142, 144, 152, 154 provides the mobile station 170 with access to the core network 100. Solutions may exist in which the base station 142, 144, 152, 154 is capable of implementing both the TDMA and WCDMA radio interfaces simultaneously.

The mobile station 170 provides a user with access to the telecommunication system. The mobile station 170 comprises two parts: mobile equipment (ME) 172 and a UMTS subscriber identity module (USIM) 174. The mobile station 170 comprises at least one transceiver for establishing a radio link to the radio access network 130. The mobile station 170 may comprise at least two different subscriber identity modules. The mobile station 170 further comprises an antenna, a user interface and a battery. Today, different types of

mobile station 170 exist, for instance equipment installed in cars, and portable equipment.

The USIM 174 comprises user-related information and information related to information security, such as an encryption algorithm.

5 With reference to Figure 2, a transmitter 200 transmits a dedicated channel 226, which is received by a receiver 216. The dedicated channel 226 provides a data transfer channel and is typically dedicated to a single transmitter-receiver pair, and may be separated from other radio channels by a specific channelization coding. The dedicated channel 226 may further be associated
10 with a specific antenna beam, which may be a transmit antenna beam or a receive antenna beam depending on the antenna configuration of the receiver 216 and the transmitter 200.

In UTRAN, the dedicated channel 226 may be an uplink dedicated physical channel, such as a DPDCH (Dedicated Physical Data Channel), and
15 DPCCH (Dedicated Physical Control Channel), for example. In this case, the transmitter 200 is base station 142, and the receiver 216 is the mobile station 170.

In UTRAN, the dedicated channel 226 may be a downlink dedicated physical channel, such as a DPCH (Downlink Dedicated Physical Channel).

20 The CDMA telecommunications system to which the invention may be applied supports use of a plurality of data transfer rates, also called transmission data rates, in transmission of the dedicated channels. Data rate typically characterizes an average number of bits, characters, symbols, or blocks per unit time transmitted by the transmitter. The unit of the data rate may be,
25 for example, bits per seconds.

The data rate may be controlled by a rate controller 206 in the transmitter according to a rate control command 214 or a rate grant command 214. The rate control command 214 or the rate grant command 214 may be generated in the base station 142 or in the mobile station 170 depending on
30 the embodiment.

The physical signal carrying the dedicated channel 226 may be amplified in a power amplifier 202 in the transmitter 200.

The dedicated channel 226 is received by the receiver 216, which may measure a SIR (Signal-to-interference Ratio) in a SIR measurement unit
35 220. A SIR measurement procedure and the structure of the SIR measurement unit 220 are known to one skilled in the art.

The SIR characterizes a signal quality of the dedicated channel obtained with a direct measurement. Thus, in an interpretation, the SIR may be one of the following: SIR (a ratio of the signal power to the interference power), E_b/N_0 (a ratio of the combined received energy per information bit to the noise power spectral density), E_b/N_t (a ratio of the combined received energy per information bit to the effective noise power spectral density), E_d/I_0 (a ratio of the pilot energy accumulated over one PN chip period to the total power spectral density in the received bandwidth), and C/I (a ratio of the carrier power to the interference power). The invention is not, however, restricted to the aforementioned measures.

A measured SIR 228 is inputted from the SIR measurement unit 220 into a comparator unit 222, which compares the measured SIR with a target SIR 250 received from an adjusting unit 236. The target SIR 250 provides a reference SIR value for a closed loop power control.

The comparator 222 generates a transmit power control command 230 (TPC) on the basis of the comparison, and inputs the TPC 230 into a multiplexer 224. For example, if the measured SIR 228 is smaller than the target SIR 250, the TPC 230 aims at increasing the transmit power of the dedicated channel 226. If the measured SIR is larger than the target SIR 250, the TPC 230 aims at decreasing the transmit power of the dedicated channel 226.

The multiplexer 224 multiplexes the TPC 230 into a physical channel 232, such as the DPCH or DPCCH, and provides the TPC 230 to the receiver 200. The physical channel 232 may further transfer a payload signal 252 inputted into the multiplexer 224. The receiver 200 may include a demultiplexer 208, which extracts the TPC 230 from the physical channel 232, and provides the power amplifier 202 with the TPC 212.

The power amplifier 202, the SIR measurement unit 220, the comparator 222, the multiplexer 220, and the demultiplexer 208 provide an example of an implementation of an inner loop of closed-loop power control. The invention is not, however, restricted to the presented example but may be applied to any power control mechanism, which supports fast power control, wherein a target SIR 250 is used as a reference value for the inner loop. In UTRAN, for example, the duration of a cycle of the inner loop may be 667 microseconds at minimum, and the inner loop power control works together with the open loop power control.

Coding blocks, such as frames, of the dedicated channel 226 may be decoded in the decoder 218. The decoder 218 may report an error indicator 248 to the adjustment unit 236. The error indicator 248 typically characterizes the quality of the data transfer carried by the dedicated channel 226. The error indicator 248 may be a result of a CRC (Cyclic Redundancy Check), estimated BER, soft information, or E_b/N_0 , for example. The error indicator 248 typically indicates success of decoding i.e. an erroneous or correct decoding of a coding block decoded in the decoder 218.

With reference to Figure 3 let us consider an example of time evolution of parameters associated with the data transfer. The x-axis 300 shows time in arbitrary scale, such that the occasions on the right hand side take place earlier than those on the left hand side. The y-axis 320 shows the data rate and target SIR 250 in arbitrary scales.

The transmission of the dedicated channel 226 may be divided into a first TX (transmission) time interval 302 and a second TX time interval 304. Further time intervals transmitted at different data rates may occur before the second TX time interval 304 and after the first TX time interval 302, but they are not shown in Figure 3. The first TX time interval 302 and the second TX time interval 304 may locate temporally in any time instant in the transmission of the dedicated channel 226.

During the first TX time interval 302, the dedicated channel 226 is transmitted at a first data rate 306. A first coding block 308 is transmitted during the first TX time interval 302. The first data rate 306 may be any data rate supported by the telecommunications system. The target SIR may be adjusted to the value 314 during the first TX time interval 302.

During the second TX time interval 304, the dedicated channel 226 is transmitted at a second data rate 322. A second coding block 310 is transmitted during the second TX time interval 304. The second TX time interval 304 is transmitted prior to the first TX time interval 302. The second data rate 322 may be any data rate supported by the telecommunications system. The target SIR 250 is adjusted to value 316.

Figure 3 further shows a third coding block 324 transmitted prior to the first coding block 308. The third coding block 324 may have similar structure and characteristics to those of the first coding block 308 and the second coding block 310. The third coding block 324 may be transmitted at any data rate.

There may be other TX time intervals between the second TX time interval 304 and the first TX time interval 302. The other TX time intervals may be transmitted at the second data rate 322. In this context, the third coding block 324 represents any coding block, which is decoded before the reception of the first TX time interval 302, and is thus capable of providing information for adjusting the target SIR for the reception of the first TX time interval 302.

A coding block 308, 310, 324 may be a frame structure, such as a radio TTI (Transmission Time interval). In UTRAN, for example, the duration of a TX time interval 302, 304 is typically a multiple of the duration of a 20-milliseconds TTI.

The first coding block 308 and the second coding block 310 may be divided into time slots 308A, 308B, 308C and 310A, 310B, 310C, respectively. In UTRAN, a coding block 308, 310 includes 30 time slots, each time slot corresponding to an inner loop power control period.

Figure 3 illustrates a case wherein the data rate applied in the transmission of the dedicated channel 226 is changed from the second data rate 322 to the first data rate 306. The time instant of the change in the target SIR from value 316 to value 314 may be different from the time instant of the change of the data rate from the second data rate 322 to the first data rate 306.

The adjusting unit 236 adjusts the target SIR 250 to match the first data rate 306, and inputs the target SIR 314 into the comparator 222. Now, the target SIR 250 matches the transmission data rate, and the inner loop of the closed-loop power control converges to a required transmit power, thus enabling minimizing the multi-user interference effects and increasing the capacity of the telecommunications system.

The adjusting unit 236 may be implemented with a computer and software, and required interfaces and connections to the receiver 216. The computer may include random access memory.

In an embodiment of the invention, the adjusting unit 236 adjusts the target SIR 250 to provide the required quality of the dedicated channel 226. The required quality may be indicated by a target FER (Frame Error Rate) or another quality measure characterizing the required quality of the data transfer. The adjusting unit 236 may, for example, include a look-up table including target SIR 250 values for various data rates for different required qualities of the dedicated channel 226. For example, there are target FER values

FER_t =5 % and FER_t =1 % corresponding to the required quality of transmission of a video signal and transmission of an electric mail file, respectively. For such a purpose, there may be a look-up table for each of target FER value, and as a result, a different target SIR 250 is obtained in the two cases, thus
 5 leading to different transmit power requirements in the transmitter 200.

In an embodiment of the invention, the adjusting unit 236 estimates a change 318 in a required SIR with respect to a change from a second data rate 322 to the first data rate 306. The required SIR is defined, for example, by the target FER. The target SIR 314, which matches the first data rate 306, may
 10 be obtained by subtracting the change 318 in the required SIR from the target SIR 316, which matches the second data rate 322.

It is noted that additional factors, such as those depending on decoding results indicated by the error indicator value 248, may be accounted for when estimating the change in the target SIR. It is further noted that there may
 15 be other coding blocks between the first coding block 308 and the second coding block 310.

The error indicator value 248 may characterize the reliability of the decoding of a third coding block 324 transmitted prior to the first TX time interval 302. In an embodiment, the third coding block 324 is transmitted k coding
 20 blocks prior to the first coding block 308, wherein k coding blocks characterizes a decoding delay 326 and k=1,2,

The changes 318 in the required SIR corresponding to different target FERs may be stored in the memory of the adjusting unit 236 and retrieved from the memory according to the change in the data rate 312. In terms of
 25 mathematical expressions, the target SIR corresponding to the first data rate may be expressed as

$$SIR_t(r_1) = SIR_t(r_2) + \Delta_{FIXED} + \Delta_{RATE_SENSITIVE}(r_1, r_2), \quad (1)$$

wherein SIR_t(r₁) and SIR_t(r₂) are the target SIR values matching the first data rate r₁ and the second data rate r₂, respectively. Parameter Δ_{RATE_SENSITIVE}(r₁, r₂) characterizes the change in the required SIR when the data rate is changed
 30 from the second data rate r₂ to the first data rate r₁. For example Δ_{RATE_SENSITIVE}(r₁, r₂) may be written as

$$\Delta_{RATE_SENSITIVE}(r_1, r_2) = \left(\frac{E_b}{N_o} \right)_{r_1} - \left(\frac{E_b}{N_o} \right)_{r_2} \quad (2)$$

wherein E_b is the receiver energy per bit, and N_o is the power density in the received frequency band. Quantities $\left(\frac{E_b}{N_o}\right)_{r_1}$ and $\left(\frac{E_b}{N_o}\right)_{r_2}$ are the target values

of the $\left(\frac{E_b}{N_o}\right)$ corresponding to a required quality, such as that indicated by the

target FER, of the dedicated channel 226 for the first data rate r_1 and the second data rate r_2 , respectively. The target values $\left(\frac{E_b}{N_o}\right)_{r_1}$ and $\left(\frac{E_b}{N_o}\right)_{r_2}$ may be

obtained by a link level simulation, for example, and stored in the memory of the adjusting unit 236. Eq. (1) may be applied, for example, when the first TX time interval 302 and the second TX time interval 304 are consecutive TX time intervals.

The target values of $\left(\frac{E_b}{N_o}\right)_{r_1}$ and $\left(\frac{E_b}{N_o}\right)_{r_2}$ may be located in a look-

up table of the adjusting unit 236 and retrieved from the look-up table by inputting the appropriate data rate or an index of the data rate into the look-up table.

Parameter Δ_{FIXED} characterizes the change in the data rate due to the conventional target SIR adjustment, and can be expressed as

$$\Delta_{FIXED} = -\frac{\Delta_{UP}}{1/FER_t - 1}, \quad (3)$$

when the error indicator value 248 indicates a successful decoding of the third coding block 324 transmitted prior to the first TX time interval 302, and

$$\Delta_{FIXED} = \Delta_{UP}, \quad (4)$$

when the error indicator value 248 indicates an unsuccessful decoding of the third 324 coding block transmitted prior to the first TX time interval 302.

In an embodiment of the invention, the adjusting unit 236 indicates if the target SIR $SIR_t(r_1)$, such as that shown in Equation (1), falls outside a range of the allowed SIR values. The allowed SIR values may be specific to the required quality of the dedicated channel 226 and the range may be defined by a lower limit SIR_{min} and an upper limit SIR_{max} . If the target SIR falls outside the range $[SIR_{min}, SIR_{max}]$, the adjusting unit 236 sets the target SIR in to a value, which falls within the range. For example, if the target SIR $SIR_t(r_1)$ is greater than SIR_{max} , the target SIR may be fixed at the SIR_{max} value i.e. $SIR_t(r_1) = SIR_{max}$ until a new target SIR falls within the range. If the target SIR $SIR_t(r_1)$ is less than the SIR_{min} the target SIR may be fixed at the SIR_{min} value i.e. $SIR_t(r_1) = SIR_{min}$, until a new target SIR falls within the range.

A test whether the target SIR falls outside the range of the allowed SIR values and the setting procedure wherein the target SIR is set to an allowed SIR value may be implemented with a computer and software in the adjusting unit 236.

5 A case may occur, where the receiver 216 requires information on the data rates applied in the transmission. The first data rate value may be indicated with signalling information provided to the adjusting unit 236 prior to changing the data rate from one to another. The adjusting unit 236 may include a register, where possible data rates and the associated adjusting pa-
 10 rameters, such as the target values of $\left(\frac{E_b}{N_o}\right)_{r_1}$ and $\left(\frac{E_b}{N_o}\right)_{r_2}$ are stored.

In an embodiment of the invention, the adjusting unit 236 includes a look-up table, which provides the adjusting parameters for a given data rate and given target FER.

15 In an embodiment of the invention, the adjusting unit 236 receives data rate information 240 on the first data rate 306. The data rate information 240 may include, for example, an exact value of the first data rate 306.

In an embodiment of the invention, the arrangement 234 further includes a predicting unit 238 connected to the adjusting unit 236. The predicting unit 238 predicts the first data rate from received signalling information 242.
 20 The predicted first data rate 244 is inputted from the predicting unit 238 into the adjusting unit 236. The prediction may be used, for example, when the first data rate to be used in the transmission is not available before the reception of the first coding block 308. The predicting unit 238 may be implemented with a computer and appropriate software.

25 A similar predicting procedure may be applied to predict any data rate used in constructing the target SIR.

For example, when the transmitter 200 transmitting the dedicated channel 226 is a base station 142, a scheduler located in the base station 142 or in the radio network controller 146 determines the first data rate to be used
 30 in the transmission, and notifies the mobile station 170 about the first data rate with signalling information 242. In such a case, the predicting unit 238 located in the mobile station 170 generates the first data rate value on the basis of the signalling information.

When the transmitter 200 transmitting the dedicated channel 226 is
 35 a mobile station 170 a scheduler located in the base station 142 or in the radio

network controller 146 determines an appropriate data rate to be used in the transmission and transmits to the mobile station 170 rate control commands 214 or rate grant commands 214 according to which the rate controller 206 of the mobile station 170 determines the actual data rate i.e. the first data rate.

- 5 The first data rate may be selected on the basis of the data rate suggested by the base station 142, and status information, such as buffer information and power information, of the mobile station 170. The mobile station 170 may transmit the information on the first data rate to the base station 142, and further to the adjusting unit 236, in advance. In some cases, however, the information on the first data rate is transmitted simultaneously with the dedicated channel 226, and the first data rate is predicted in the adjusting unit 236 based on the rate control commands 214 or rate grant commands 214 transmitted to the mobile station 170.

- 15 The prediction of the data rates may indicate that the parameters, such as the target values of $\left(\frac{E_b}{No}\right)_{r_1}$ and $\left(\frac{E_b}{No}\right)_{r_2}$ for the predicted first data

rate r_1 and the predicted second data rate r_2 , respectively, used in constructing the target SIR, may be unknown a priori to the adjusting unit 236. In an embodiment, the adjusting unit 236 estimates a required value of the target $\left(\frac{E_b}{No}\right)_{r_1}$ by using the target values of $\left(\frac{E_b}{No}\right)$ for data rates known to the adjust-

- 20 ing unit 236. The estimation may be performed with interpolating or extrapolating methods, for example. The estimation may be implemented with a computer and software, for example. It may also be possible, that the estimated target $\left(\frac{E_b}{No}\right)$ is then stored in the memory of the adjusting unit 236 for a later use.

- 25 It is noted, that although the prediction of the data rate is described in conjunction with the first data rate, similar procedures and functional elements, such as the predicting unit 238, may be applied to any TX time interval occurring in the bit stream transmitted between the transmitter 200 and the receiver 216.

- 30 In mathematical terms, the target SIR may be expressed as follows:

$$SIR_t(r_1) = SIR_t(r_2) + \Delta_{FIXED} - f\left\{\left(\frac{E_b}{No}\right)_{r_2}, \left(\frac{E_b}{No}\right)_{r_{2P}}\right\} + \left(\frac{E_b}{No}\right)_{r_{1P}}, \quad (5)$$

where data rates r_{2p} and r_{1p} are predicted data rates of the second data rate r_2 and the first data rate r_2 , respectively. The value of the Δ_{FIXED} depends on whether the second coding block 310 was decoded correctly or erroneously. Function f characterizes contribution of the data rate change to the change in the target SIR and may be expressed in more explicit form as

$$f\left\{\left(\frac{E_b}{N_o}\right)_{r_2}, \left(\frac{E_b}{N_o}\right)_{r_{2p}}\right\} = \omega \left(\frac{E_b}{N_o}\right)_{r_2} + (1-\omega) \left(\frac{E_b}{N_o}\right)_{r_{2p}}, \quad (6)$$

where parameter ω accounts for an error in the data rate prediction of the second data rate r_2 and may have values between 0 and 1. If the second coding block 310 was decoded erroneously, parameter ω takes value ω_1 . If the second coding block 310 was decoded correctly, parameter ω takes value ω_2 . Furthermore, if the predicted value of the second data rate r_2 is a known parameter, ω may be set to $\omega=0$.

In general terms, the $SIR_t(r_2)$ and the function arguments in function f may be results from the previous target SIR adjusting step, whose adjusting parameters, such as the $\left(\frac{E_b}{N_o}\right)$ value, are available to the adjusting unit 236.

With this procedure, the SIR adjusting procedure follows smoothly the changes in the radio environment and the requirements of the radio link.

Embodiments of the invention may also be considered in terms of non-consecutive frames transmitted in the dedicated channel 226. A target SIR for a n_2 :th frame may be expressed as

$$SIR_t(n_2) = SIR_t(n_1) + \sum_{n=n_1+1-k}^{n_2-k} g(e_n) - f\left\{\left(\frac{E_b}{N_o}\right)_{r_{n_1}}, \left(\frac{E_b}{N_o}\right)_{r_{n_1P}}\right\} + \left(\frac{E_b}{N_o}\right)_{r_{n_2P}} \quad (7)$$

wherein $SIR_t(n_2)$ and $SIR_t(n_1)$, respectively, denote the SIR targets of the dedicated channel 226 for the n_1 th and n_2 th frames. Factor e_n is the error indicator value 248 of the n th coding block. Factor $g(e_n)$ the function of SIR target difference dependent on the success or failure of decoding the n th frame transmitted between the (n_1+1-k) th and (n_2-k) th frames. Factor k represents the coding delay in coding block units.

The equations (1) to (7) and the quantities therein are typically expressed in dB units. However, it is clear to one skilled in the art how to convert the equations into other units.

In an embodiment of the invention, the receiver is located in a mobile station 170 and the transmitter 200 is located in a base station 142. In this

case, the adjusting unit 236, and the predicting unit 238 are located in the mobile station 170.

In an embodiment of the invention, the receiver 216 is located in a base station 142 and the transmitter 200 is located in a mobile station 170. In this case, the adjusting unit 236, and the predicting unit 238 may be located in the base station 142 or in the radio network controller 146. Applications may exist, wherein the adjusting unit 236, and the predicting unit 238 are distributed both to the base station 142 and the radio network controller 146.

With reference to Figure 4, the methodology according to embodiments of the invention is illustrated.

In 400, the method starts.

In 402, the first data rate is predicted from received signalling information.

In 404, a change in a required SIR is estimated with respect to a change from a second data rate to the first data rate, the second data rate being applied to the dedicated channel 226 during a second TX time interval transmitted prior to the first TX time interval.

In 406, the target SIR is adjusted to match a first data rate applied during a first TX time interval of the dedicated channel 226.

In 408, it is indicated if the target SIR falls outside a range of the allowed SIR values.

In 410, if the target SIR falls outside the range of the allowed target SIR values, the target SIR is set into a value which falls within the allowed range.

In 412, the method ends.

Even though the invention is described above with reference to an example according to the accompanying drawings, it is clear that the invention is not restricted thereto but it can be modified in several ways within the scope of the appended claims.

Claims

1. A method of controlling radio resources in telecommunications system supporting use of a plurality of data transfer rates in transmission of dedicated channels between a transmitter and a receiver, the method characterized by adjusting (406) a target SIR to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing a reference SIR value for closed-loop power control, wherein a comparison between a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter on the basis of the comparison.

2. The method of claim 1, characterized by predicting (402) the first data rate from received signalling information.

3. The method of claim 1, characterized by estimating (404) a change in a required SIR with respect to a change from a second data rate to the first data rate, the second data rate being applied to the dedicated channel during a second TX time interval transmitted prior to the first TX time interval; and

adjusting (406) the target SIR by using the change in the SIR and a target SIR that matches the second data rate.

4. The method of claim 1, characterized by adjusting (406) the target SIR to provide a required quality of the dedicated channel.

5. The method of claim 1, characterized by indicating (408) if the target SIR falls outside a range of the allowed SIR values; and

setting (410) the target SIR into a value which falls within the range of the allowed SIR values.

6. The method of claim 1, characterized by adjusting (406) the target SIR by using the following:

a target SIR adjusted to match the second data rate applied in transmission of a second TX time interval transmitted prior to the first TX time interval;

an error indicator value characterizing the reliability of the decoding of a third coding block transmitted prior to the first TX time interval;

a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the dedicated channel transmitted at the second data rate;

a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the

dedicated channel transmitted at the first data rate.

7. The method of claim 1, characterized by adjusting (406) the target SIR by using an error indicator value characterizing the reliability of the decoding of a third coding block transmitted prior to the first TX time interval.

8. An arrangement for controlling radio resources in telecommunications system supporting use of a plurality of data transfer rates in transmission of a dedicated channel transmitted from a transmitter (200) to a receiver (216), characterized in that the arrangement includes an adjusting unit (236) connected to the receiver, for adjusting a target SIR to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing a reference SIR value for closed-loop power control, wherein a comparison between a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter (200) on the basis of the comparison.

9. The arrangement of claim 8, characterized in that the arrangement further includes a predicting unit (238), connected to the adjusting unit (236), for predicting the first data rate from received signalling information.

10. The arrangement of claim 8, characterized in that the adjusting unit (236) is configured to estimate a change in a required SIR with respect to a change from a second data rate to the first data rate, the second data rate being applied to the dedicated channel during a second TX time interval transmitted prior to the first TX time interval; and

the adjusting unit (236) is configured to adjust the target SIR by using the change in the SIR and a target SIR that matches the second data rate.

11. The arrangement of claim 8, characterized in that the adjusting unit (236) is configured to adjust the target SIR to provide the required quality of the dedicated channel.

12. The arrangement of claim 8, characterized in that the adjusting unit (236) is configured to indicate if the target SIR falls outside a range of the allowed SIR values; and

the adjusting unit (236) is configured to set the target SIR into a value which falls within the range of allowed SIR values.

13. The arrangement of claim 8, characterized in that the adjusting unit (236) is configured to adjust the target SIR by using the following:

5 a target SIR adjusted to match the second data rate being applied in transmission of a second TX time interval transmitted prior to the first TX time interval;

an error indicator value (248) characterizing the reliability of the decoding of a third coding block (324) transmitted prior to the first TX time interval (302);

10 a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the dedicated channel transmitted at the second data rate;

a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the dedicated channel transmitted at the first data rate.

14. The arrangement of claim 8, characterized in that the
15 adjusting unit (236) is configured to adjust the target SIR by using an error indicator value (248) characterizing the reliability of the decoding of a third coding block (324) transmitted prior to the first TX time interval (302).

15. The arrangement of claim 8, characterized in that the
20 receiver (216) is located in a mobile station (170) and the transmitter (200) is located in a base station (142).

16. The arrangement of claim 8, characterized in that the receiver (216) is located in a base station (142) and the transmitter (200) is located in a mobile station (170).

17. A radio network controller in telecommunications system supporting use of a plurality of data transfer rates in transmission of a dedicated
25 channel from a transmitter (200) to a receiver (216), characterized in that the radio network controller includes an adjusting unit (236) connected to the receiver (216), for adjusting a target SIR to match a first data rate applied during a first TX time interval of the dedicated channel, the target SIR providing
30 a reference SIR value for closed-loop power control, wherein a comparison between a SIR measured from the dedicated channel transmitted at the first data rate and the target SIR is performed, and wherein a transmit power control command is provided to the transmitter (200) on the basis of the comparison.

18. The radio network controller of claim 17, characterized in that the radio network controller further includes a predicting unit (238), connected to the adjusting unit (236), for predicting the first data rate from received signalling information.

5 19. The radio network controller of claim 17, characterized in that the adjusting unit (236) is configured to estimate a change in a required SIR with respect to a change from a second data rate to the first data rate, the second data rate being applied to the dedicated channel during a second TX time interval transmitted prior to the first TX time interval; and

10 the adjusting unit (236) is configured to adjust the target SIR by using the change in the SIR and a target SIR that matches the second data rate.

20. The radio network controller of claim 17, characterized in that the adjusting unit (236) is configured to adjust the target SIR to provide the required quality of the dedicated channel.

15 21. The radio network controller of claim 17, characterized in that the adjusting unit (236) is configured to indicate if the target SIR falls outside a range of the allowed SIR values; and

 the adjusting unit (236) is configured to set the target SIR into a value which falls within the range of allowed SIR values.

20 22. The radio network controller of claim 17, characterized in that the adjusting unit (236) is configured to adjust the target SIR by using the following:

 a target SIR adjusted to match the second data rate being applied in transmission of a second TX time interval transmitted prior to the first TX time interval;



 an error indicator value characterizing the reliability of the decoding of a third coding block (324) transmitted prior to the first TX time interval (302);

 a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the dedicated channel transmitted at the second data rate;

30 a target $\left(\frac{E_b}{N_o}\right)$ value corresponding to the required quality of the dedicated channel transmitted at the first data rate.

23. The radio network controller of claim 17, characterized in that the adjusting unit (236) is configured to adjust the target SIR by using



an error indicator value (248) characterizing the reliability of the decoding of a third coding block (324) transmitted prior to the first TX time interval (302).



(57) Abstract

Telecommunications system supporting a plurality of data rates includes an adjusting device, which adjusts a target SIR of closed-loop power control to match a data rate applied in transmission of a dedicated channel. The invention provides data-rate-sensitive power control thus increasing the accuracy of the power control and improving the performance of the telecommunications system.

(Figure 2)



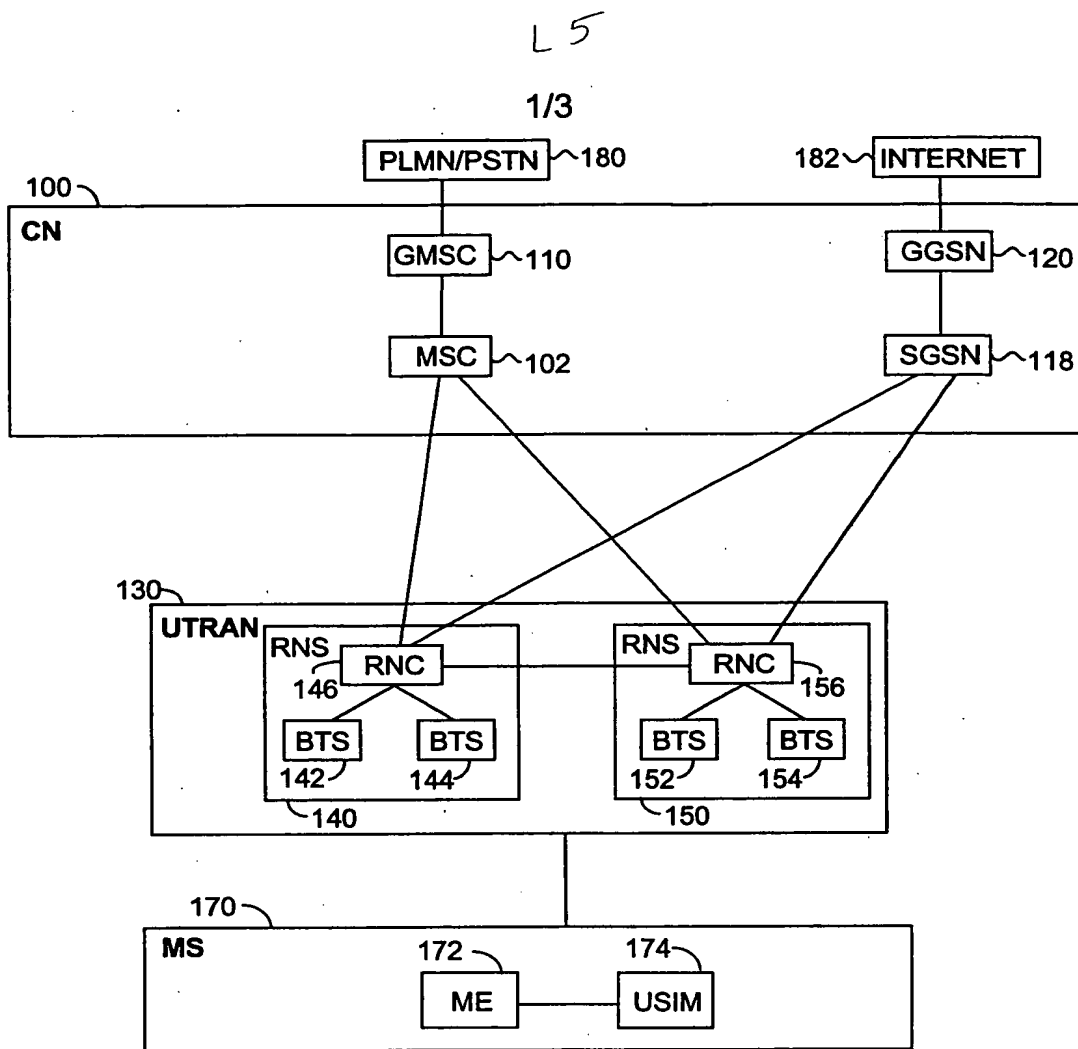


Fig. 1

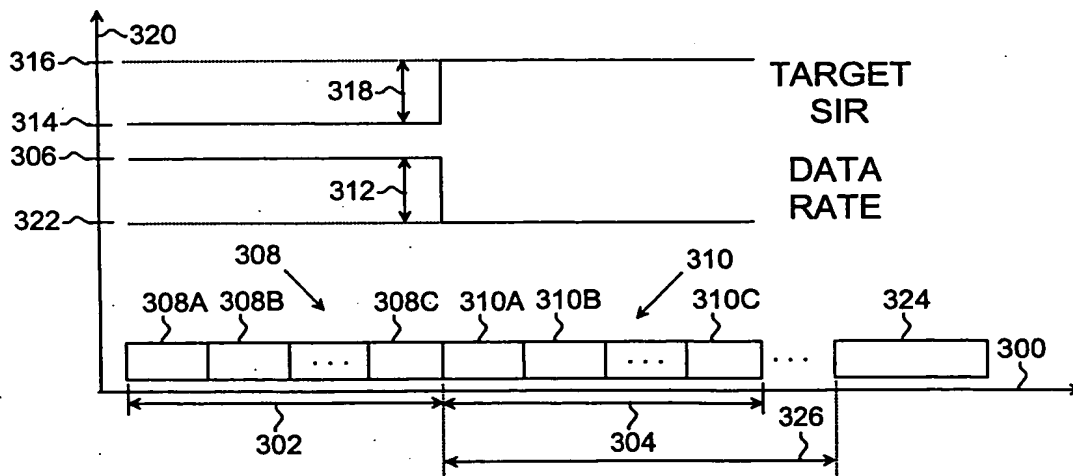


Fig. 3

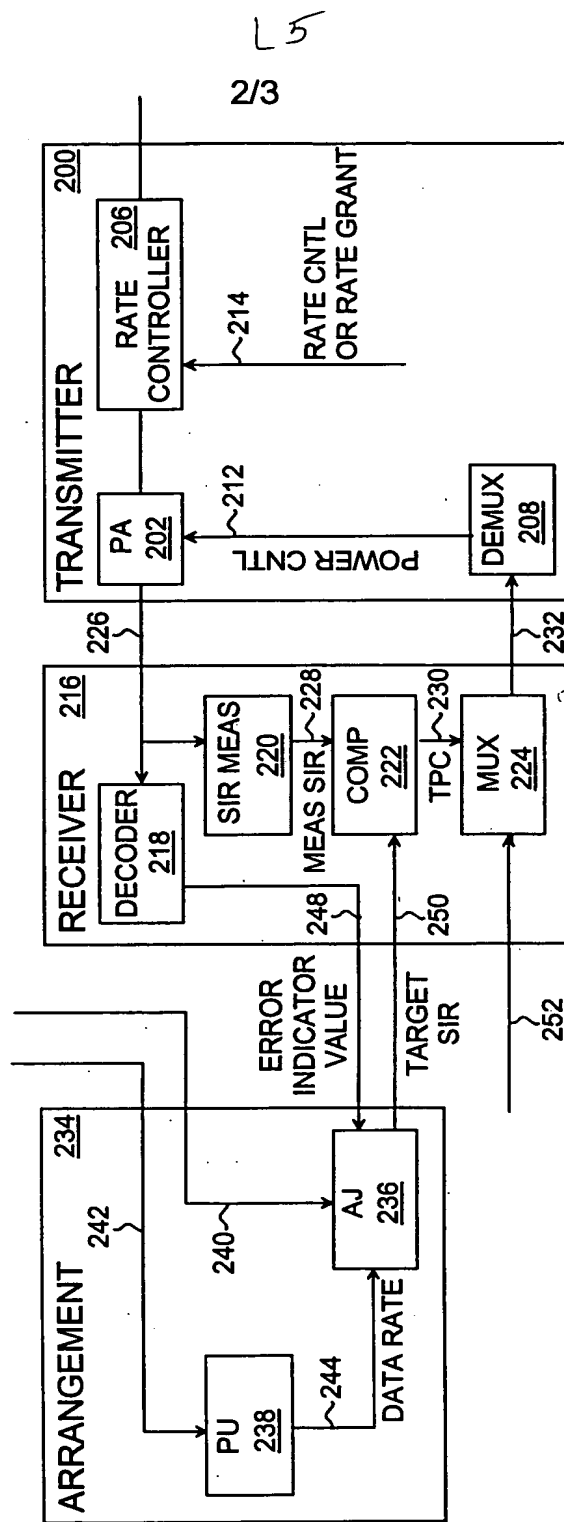


FIG. 2

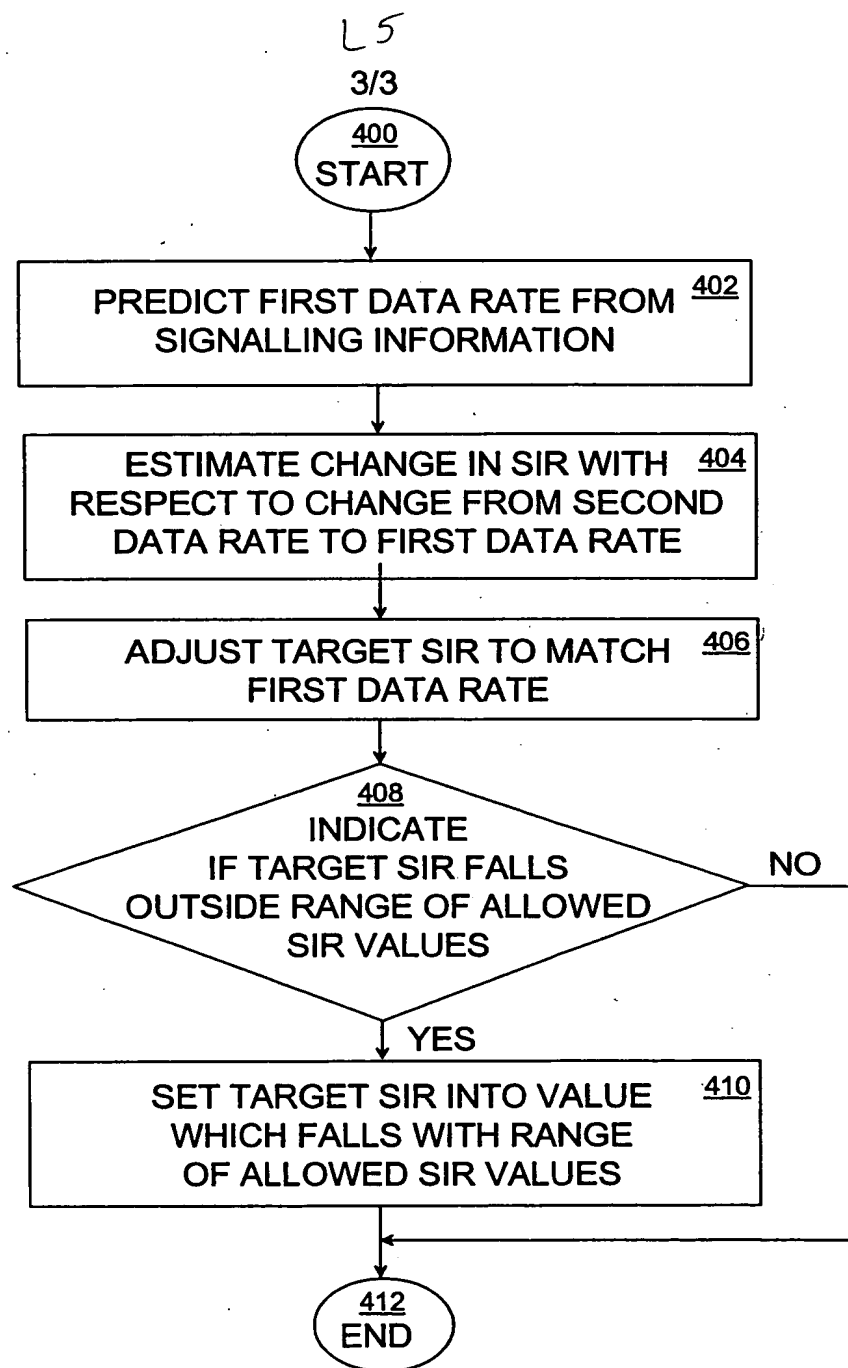


FIG. 4